

Item no.: LTAP-MINI-LTE-KIT


## RB912R-2ND-LTM&R11E-LTE - LtAP mini LTE kit - with 650 MHz CPU, 64 MB RAM

from **139,79 EUR**

Item no.: LTAP-MINI-LTE-KIT

shipping weight: 0.50 kg

Manufacturer: MikroTik

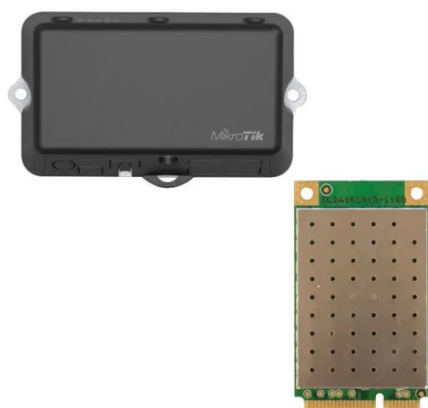

### Product Description

MikroTik LtAP mini LTE kit - RB912R-2nD-LTm&R11e-LTE with 650 MHz CPU, 64 MB RAM

The LtAP mini LTE kit is a small waterproof wireless access point with a built in cellular modem that supports 2G (international version only), 3G and 4G (LTE) connectivity. It is also available separately, without the modem, so you can use your own.

Connect to the LtAP minis built-in 802.11b/g/n wireless and access the LTE network from your phone or any other wireless device. The LtAP mini LTE also has one 10/100 Ethernet LAN port for your wired devices. The RS232 serial port gives you console access for debugging.

LtAP mini has a special enclosure with a wall mounting kit, two SIM slots to alternate between cellular providers, and integrated GPS support, making this a perfect device for use in moving vehicles like cars, buses or trains. External GPS antenna is available for ordering separately (not included, product code GPSANT).

The LTE card is connected to two internal antennas with u.FL connectors, so if you want, you can unplug the connectors and add your own external LTE antenna for better coverage. The unit has several powering options: 9-30 V PoE-in by Ethernet port, DC jack and microUSB.

Use the built in GPS module to track the location of your vehicle in real time, MikroTik has even provided a simple tracking application example in the RouterOS documentation to help you start development of your platform.

- Product code: RB912R-2nD-LTm&R11e-LTE
- CPU: QCA9531 650 MHz
- Size of RAM: 64 MB
- Storage: 16 MB
- 10/100 Ethernet ports: 1
- Wireless: Built-in 2.4 GHz 802.11b/g/n, dual-chain
- Wireless chip model: QCA9531
- Wireless regulations: Specific frequency range can be limited by country regulations
- Antenna beam width: 360°
- Wireless antenna gain: 1.5 dBi
- GPS: Built-in MT3337V, with uFLL RF connector and active antenna support
- PoE in: Yes
- SIM slot: 2 Mini SIM slots
- LTE modem: Included
- LTE category: 4 (150 Mbps downlink, 50 Mbps uplink)
- 3G category: R7 (21 Mbps downlink, 5.76 Mbps uplink)
- 2G category: Class 12
- LTE antenna gain: 3.5 dBi (with uFLL connector)
- Serial port: RS232 (shared with GPS port)
- Supported input voltage:
- PoE in: 10 - 57 V (passive PoE and 802.3af/at with unshielded cable)
- DC jack: 8 - 30 V
- MicroUSB: 5 V
- Dimensions: 139 x 77 x 28,5 mm
- Operating temperature: -40°C to +70°C tested
- License level: 4
- Operating system: RouterOS
- Max. power consumption: 9 W

### Specifications

**Scan this QR code to  
view the product**  
All details, up-to-date  
prices and availability

