


Item no.: 354383

## Patch cable fibre optic simplex OS2 (singlemode, 9/125) SC (APC) / SC (APC), LSZH, 5 m

from **4,67 EUR**

Item no.: 354383  
shipping weight: 0.10 kg  
Manufacturer: VARIA Group

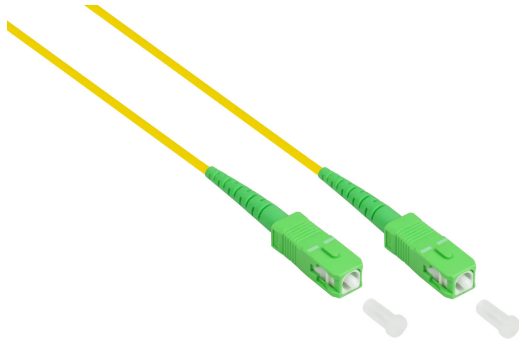

### Product Description

Fibre optic patch cables enable different network components to be connected to each other and ensure loss-free data transmission. Different quality classes (OMx/OSx) facilitate the qualitative and functional differentiation of a fibre optic patch cable.

Whether in private households or in demanding and professional application scenarios - with its small 15 mm bending radius and very good attenuation values, this simplex patch cable is ideally suited in the connection area of FTTH (Fibre To The Home), FTTB (Fibre To The Building), FTTO (Fibre To The Office) as well as FTTx. For example, it can be used between the house transfer point (HUP) and the network termination device / optical network termination (ONT) / modem. It can also be used to connect NAS, gaming PC or media centre with router or modem. The use of high-quality materials and modern production facilities as well as continuous quality controls during the production process ensure loss-free signal transmission and consistently high quality. Each individual patch cable undergoes testing after assembly. After successful measurement, an individual measurement/test report is enclosed with each patch cable.

- Fibre quality: OS2 | Core/fibre: G652D - 9/125 micrometre | Singlemode | Halogen-free (LSZH) and flame-retardant - 2.00 mm diameter
- Connectors: SC (APC) simplex plug to SC (APC) simplex plug
- Attached bend relief / Min. bending radius: 15 mm / Working temperature: -40 to +85 °C
- High quality standards, 100% testing: Each cable comes with its own measuring/testing protocol

- Fibre optic simplex patch cable
- Connection 1: SC (APC)
- Connection 2: SC (APC)
- Incl. dust protection caps
- Attached bend protection sleeve
- Fibre grade: OS2
- Fibre: G652D
- Fibre type: Singlemode 9/125µ
- Cable construction: Simplex
- Cable diameter: 2.0 mm
- Jacket material: Halogen free (LSZH)
- Min. bending radius: 15 mm
- Working temperature: -40 to +85 °C
- Quality: Each cable comes with its own measuring/testing protocol
- Colour: Yellow (OS2)
- Length: 5 m

### Specifications

Scan this QR code to  
view the product  
All details, up-to-date  
prices and availability

